



V980-BOX INSTALLATION BOX

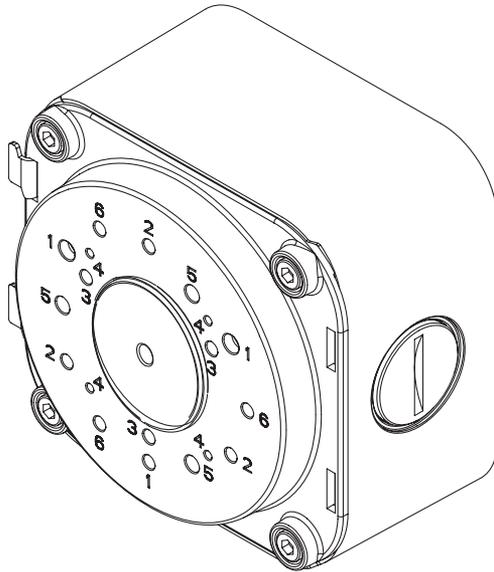

Vicon part number 8009-8302-50-01 Rev 6/2020
Specifications subject to change without notice.
Copyright © 2020 Vicon Industries Inc.

Please read this manual thoroughly before use, and keep it handy for future reference.

Template sheet

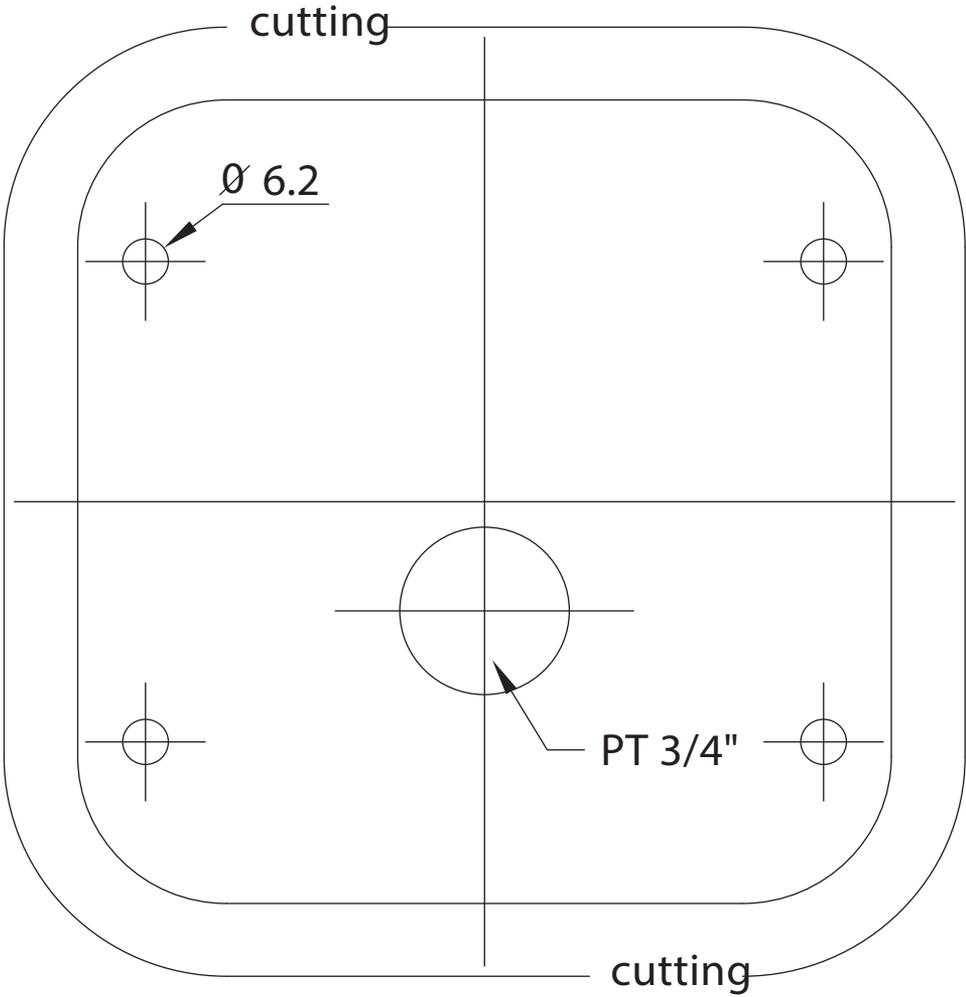

Package contents


Carefully remove the contents from the box, and verify that nothing was damaged in shipment.

- Installation box
- Accessory kit
- Manual (Template sheet)

■ PARTS LIST

Item	PART NAME	Q'ty	DESCRIPTION
1	Mount bracket	1	AL
2	Junction box	1	AL
3	Hole Grommet	1	Silicon
4	Gasket gland	1	Silicon
5	Bolt	4	M5 x 15mm
6	L-Wrench	1	M5
7	Screw	3	PH M5 x 14mm
8	Screw	3	PH M6 x 12mm
9	Screw	4	PH M3 x 14mm
10	Screw	4	PH 6 x 60mm (Tapping)
11	Anchor	4	

Dimension drawing

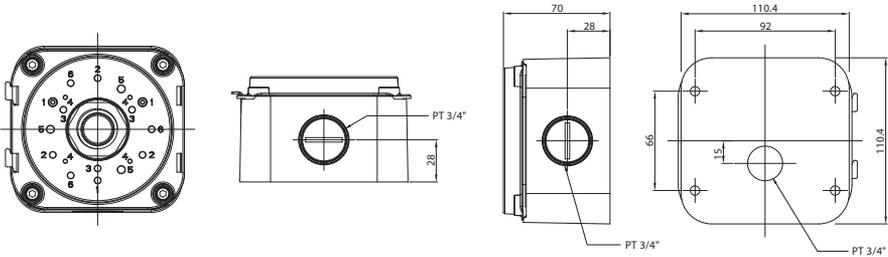


Specifications


Item	PART NAME	DESCRIPTION
1	Mount bracket	Weight (set+packing)
2	Junction box	Die cast and Aluminum
3	Construction	Polyester power coat
4	Weight (set+packing)	895g(720+175) / 1.97lb(1.59+0.38)

Base installation (For Surface Mounting)

1. Assemble PG gland to mount bracket.(a)
2. Attach the camera to the mount bracket using the screws.(b)
3. Fix the camera cable using Hole Grommet.(b)
4. Drill the mounting location, using the template sheet.
5. Attach the junction box to the wall, using the mounting screws and plastic anchors.(c)
6. Attach the camera to the junction box using the hooks.(d)
7. Connect power and camera cable.(e)
8. Closing the installation box using the wrench bolts.(f)

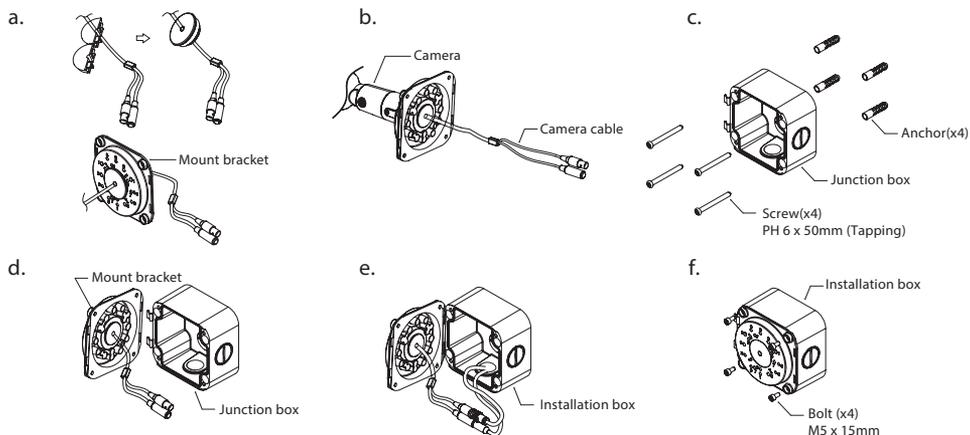


Camera installation

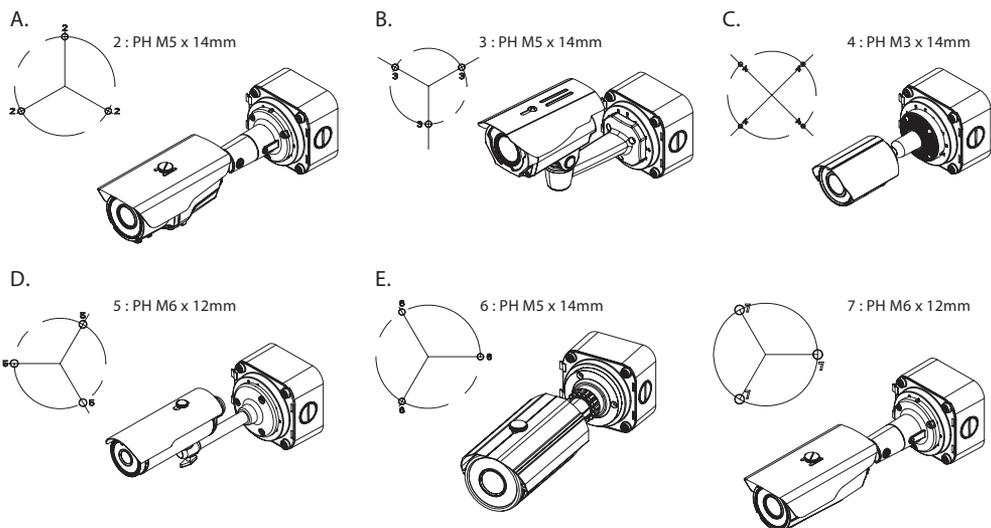

MOUNTING THE V980-BOX to the V-CMB-3 CORNER MOUNT

For mounting to a corner, the V980-BOX can be mounted to the V-CMB-3 corner mounting adapter. Follow the diagram below. Hardware is supplied.

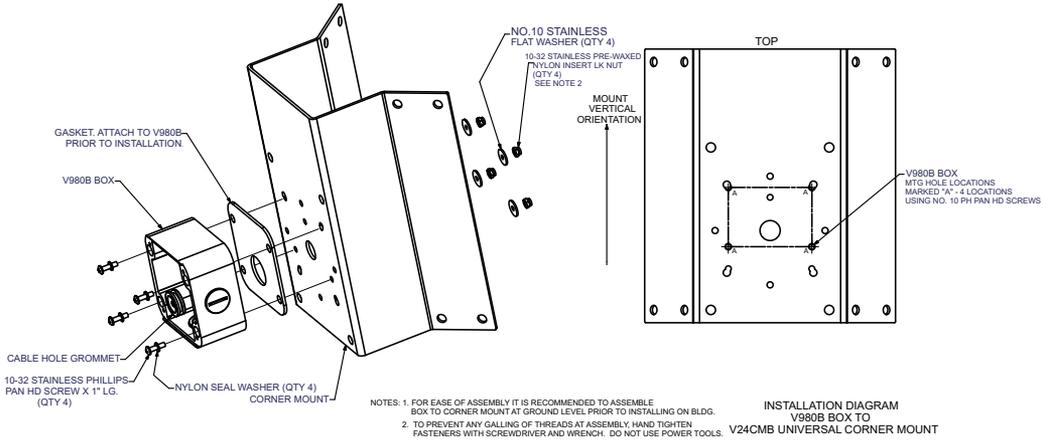

MOUNTING THE V980-BOX to the V-20B-A-3 POLE MOUNT

For mounting to a pole, the V980-BOX can be mounted to the V-20B-A-3 pole mounting adapter. Follow the diagram below. Hardware is supplied.

